


Tools Required:

3mm hex key



Dimensions

A: 7-1/2"

B: 9-1/8"



Protection Class: IP 65

LED Watts: 16.5W

Weight: 10.4 lbs

Notice to Installer for 84 683:

1. See page 2 for specific product safety warnings.
2. Fixture may be damaged if connected to conduit systems that contain water - Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
3. Wet location listing does not imply suitability for exposure to standing water for long periods of time.
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.
5. Supply wiring connection are made to 2 pole and three pole wire connectors in accompanying bollard tube. Refer to bollard tube installation instructions for wiring instructions.

NOTE: For proper installation, an accompanying bollard tube must be selected with the bollard head.


84 683 installation:

1. Install bollard tube per bollard tube installation instructions.
2. Connect all 5 wires from the bollard head to the correct intended wire from the bollard tube as described in the bollard tube installation instructions, using provided wire connectors.
3. Insert bollard head into bollard tube and turn clockwise as far as it will go (Figure 1).
4. Secure bollard head by tightening 6mm hex set screw.

84 683 installation to wood system bollard tube:

1. Route luminaire head flexible conduit with wiring through wood bollard tube to the base.
2. Insert bollard head into bollard tube and turn clockwise until stop (Figure 1).
3. Secure bollard head by tightening 3mm hex set screw on side of wood bollard tube.
4. Complete bollard tube installation by following installation instructions for wood system bollard tube.

Figure 1: Connection to the Bollard Tube

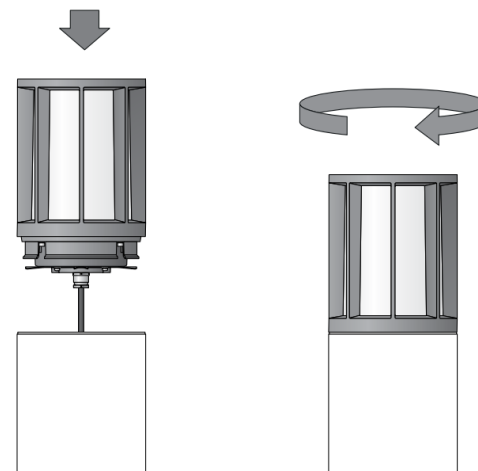

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dust and debris.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.