


Tools Required:

- 13mm socket wrench
- 4mm hex head screwdriver

Overview:

LED Watts: 62.0W
 System Watts: 77.0W
 Controllability: 0-10V dimmable
 Weight: 19.0 lbs.
 Protection Class: IP66



Dimensions

A: 13-3/8"
 B: 3"
 C: 25-7/8"




Notice to Installer:

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits 3" OD diameter poles or tenons only.
4. Pole top luminaire is supplied with a 35' wire bundle to route through pole.

99 596 Luminaire Installation:

1. Loosen the 4mm hex screw on pole cap to remove, and loosen the 4mm hex screw on the side of the slip fitter.
2. Lead wire bundle into pole.
3. To secure poletop to pole, tighten the 13mm hex nut to engage clamping mechanism. Tighten to a maximum torque value of 8.85 ft-lb.
4. Tighten the 4mm hex screw on the side of the slip fitter.
5. To adjust angle of poletop, loosen the nut and adjust joint as shown in Figure 1. Use caution, fixture will drop quickly when the hardware is loosened. Tighten nut to secure fixture position.
6. Replace cap and tighten the 4mm set screw to secure.
7. Make supply wiring connections in the base of the pole using waterproof connectors:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 0-10V dimming (if applicable):
 DIM CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
 DIM CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE

Figure 1:

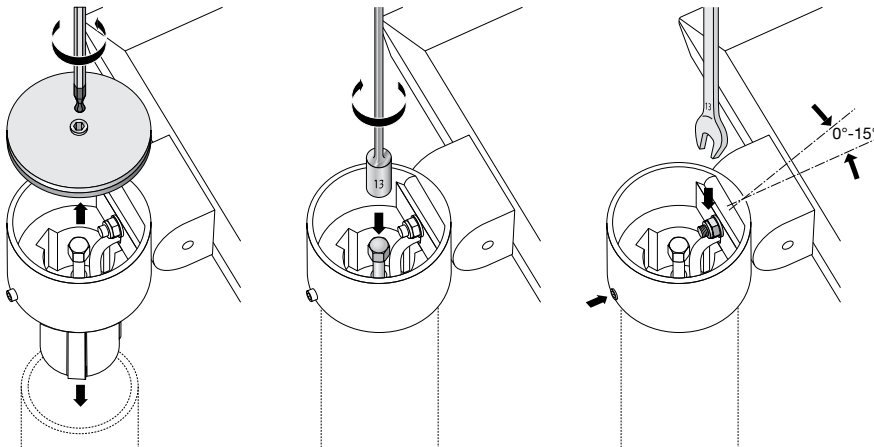

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS. LES FILS D'ALIMENTATION 60°C MIN.