

Application

Designed for low mounting heights for interior and exterior locations. The unshielded luminaire has a directing and guiding lighting effect. The illuminance level on the lit surface is lower, but the ambient brightness is greater with increased vertical illuminance.

Materials

- Clear safety glass with white ceramic coating
- Die-cast aluminum
- High temperature silicone gasket
- Mechanically captive stainless steel fasteners
- Stainless steel screw clamps
- Aluminum installation housing

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 0.5 lbs.

Electrical

- Operating voltage24VDC (remote power supply req.)
- Minimum start temperature-40° C
- LED module wattage2.1 W
- System wattage2.4 W
- ControllabilityNon-Dimming
- Color rendering indexRa > 80
- Luminaire lumens35 lm
- LED service life (L70)60000 hrs

LED color temperature

- ☐ 4000K (K4)
- ☐ 3500K (K35)
- ☐ 3000K (K3)
- ☐ 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

- ☐ Black (BLK)
- ☐ Silver (SLV)
- ☐ Natural Bronze (NTB)
- ☐ CUS:
- ☐ Bronze (BRZ)
- ☐ White (WHT)
- ☐ RAL:

Type:

BEGA Product:

Project:

Modified:

Available options

- ☐ CUSCustom finish
- ☐ MGUMarine grade undercoat
- ☐ NTBNatural bronze (premium finish)
- ☐ RALRAL Classic, matte finish



Available accessories

- ☐ B19580Remote driver box · Static white
- ☐ B19591Remote driver box · Static white

See individual accessory spec sheet for details.

Included (available for pre-shipment)

- ☐ BB2002LED Installation housing

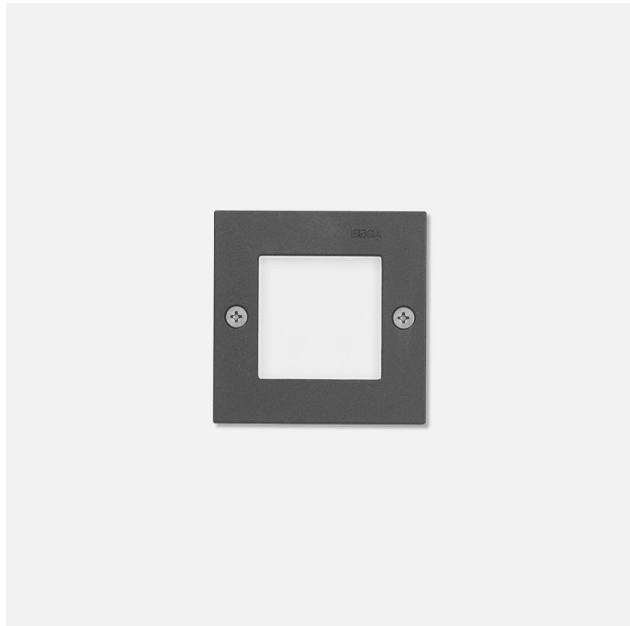

Recessed wall luminaire · Unshielded · 24V DC				
		LED	A	B
B22202	ADA	2.1 W	3 1/8	4