

Application

Recessed ceiling luminaire with very wide beam light distribution designed for downlighting atriums, canopies, passages and other interior and exterior locations.

Materials

Clear safety glass
Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
Stainless steel screw clamps
High temperature silicone gasket
Silicone optic with excellent high temperature and UV stability
Pure anodized aluminum reflector surface

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 3.1 lbs.

Electrical

LED module wattage	24.5 W
System wattage	28.5 W
Color rendering index	Ra > 80
Luminaire lumens	3050 lm
LED service life (L70)	60000 hrs

LED color temperature

- ☐ 4000K (K4)
- ☐ 3500K (K35)
- ☐ 3000K (K3)
- ☐ 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

- | | |
|---|---------------------------------------|
| ☐ Black (BLK) | ☐ Bronze (BRZ) |
| ☐ Silver (SLV) | ☐ White (WHT) |
| ☐ Natural Bronze (NTB) | ☐ RAL: |
| ☐ CUS: | |

Type:

BEGA Product:

Project:



Modified:

Available options

- | | |
|------------------------------|---------------------------|
| ☐ CUS | Custom finish |
| ☐ FSC | Fusing |
| ☐ MGU | Marine grade undercoat |
| ☐ RAL | RAL Classic, matte finish |

Included (available for pre-shipment)

- | | |
|----------------------------------|-------------|
| ☐ CP24821 | Ceiling pan |
|----------------------------------|-------------|

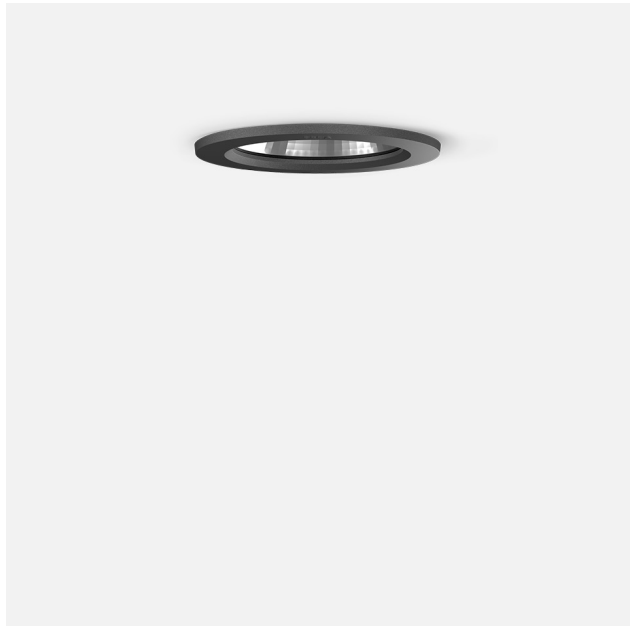

Downlight · Very wide beam					
	LED	β	A	B	C
B24833	24.5 W	56°	6 7/8	5	18