


Tools Required:

- Standard small screwdriver

Overview:

Weight: 1.7 lbs.



Dimensions

A: 15-1/8"



Notice to Installer:

- For use with floodlights equipped with 1/2" IPS nipple only.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Accessory 70 204 - installation:

- Loosen set screw on the side of earth spike prior to installation.
- Push earth spike vertically into soil until stable. If necessary, compact the soil around earth spike to secure.


NOTE: Be sure that the mounting surface has sufficient load capacity to support the floodlight and accessory.

- Route cable from floodlight into earthspike and out cable strain relief. Cable must be routed to UL listed wiring box for wiring connections.
- Make supply wiring and luminaire wiring connections in wiring box:

MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
WIRE GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

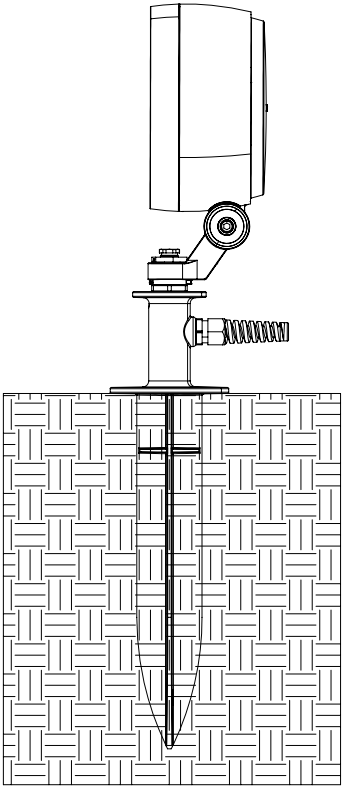

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

Consult factory for all other replacement components.