

Application
Linear in-grade floodlight with asymmetric light distribution. Designed to illuminate architectural features, signage and building facades. These luminaires are designed to bear pressure loads up to 2200 lbs. from vehicles with pneumatic tires. The luminaires must not be used for traffic lanes where they are subject to horizontal pressure from vehicles braking, accelerating and changing direction.

Materials
Corrosion-resistant 304 grade stainless steel
High temperature silicone gasket
Aluminum installation housing
Pure anodized aluminum reflector

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 67

Weight: 16.3lbs.

Electrical

Operating voltage	120-277V AC
Minimum start temperature	-30° C
LED module wattage	9.4 W
System wattage	13.0 W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	1325 lm
LED service life (L70)	60000 hrs

LED color temperature

☐ 4000K (K4)

☐ 3500K (K35)

☐ 3000K (K3)

☐ 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish
#4 brushed stainless steel. Custom colors are not available.

Type:
BEGA Product:
Project:
Modified:


Available options

☐ FSC

Fusing

Included (available for pre-shipment)

☐ BB7915LED Installation housing

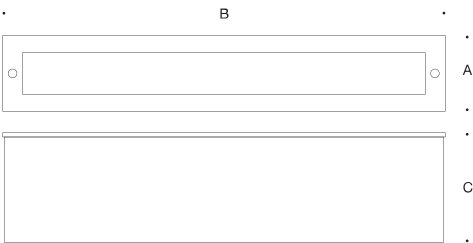

In-grade luminaire · Asymmetric				
	LED	A	B	C
B77917	9.4 W	3 1/2	20 7/8	5

