


BEGA

File: 84632K4_BEGA_IES.ies

TEST: 84632K4
TEST LAB: BEGA
DATE: 06/30/2026
LUMINAIRE: 84632K4
LAMP: 32W LED


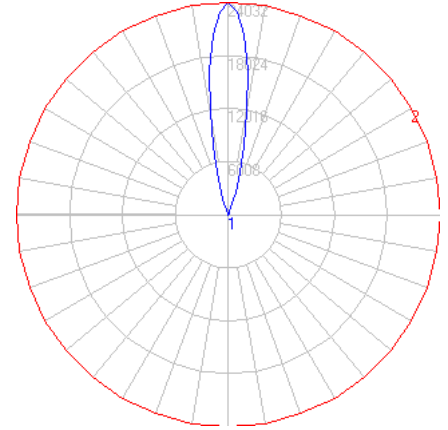


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	24032.195
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	20.1
Vertical Beam Angle (50%)	20.1
Horizontal Field Angle (10%)	36.3
Vertical Field Angle (10%)	36.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1564
Beam Efficiency	N.A.
Field Lumens	2910
Field Efficiency	N.A.
Spill Lumens	541
Luminaire Lumens	3450
Total Efficiency	N.A.
Total Luminaire Watts	36
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	1674.53
10-20	1416.57
20-30	228.63
30-40	67.90
40-50	44.36
50-60	25.26
60-70	6.00
70-80	0.97
80-90	0.69
90-100	0.61
100-110	0.45
110-120	0.06
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

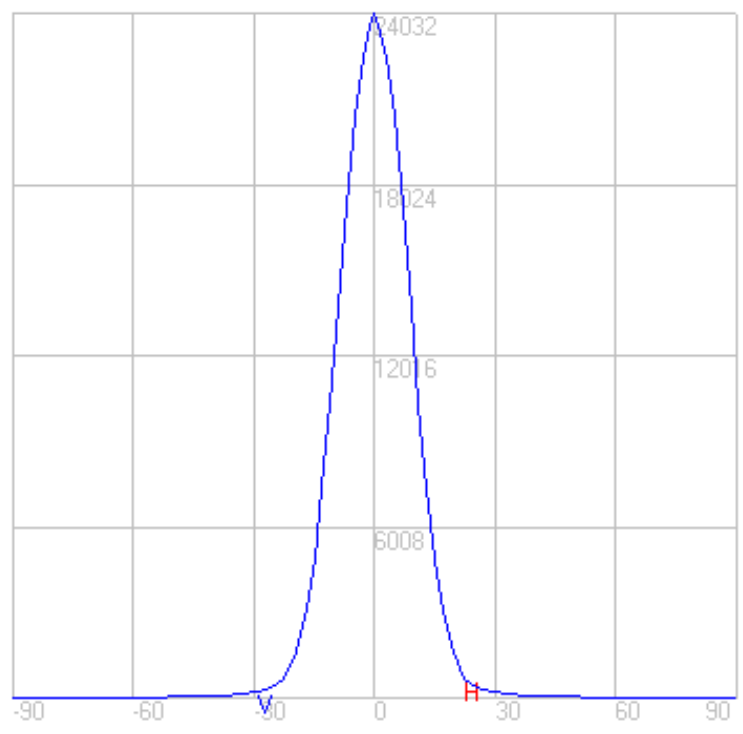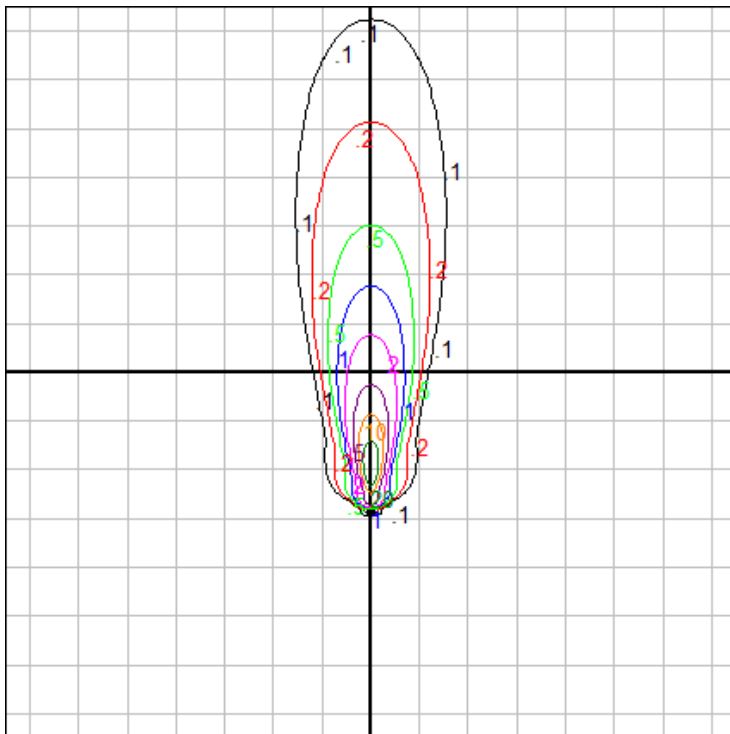

Setback Distance: 1.5 ft.

Grid Spacing: 7 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2025

06/30/2026

BEGA

File: 84632K35_BEGA_IES.ies

TEST: 84632K4
TEST LAB: BEGA
DATE: 06/30/2026
LUMINAIRE: 84632K35
LAMP: 32W LED

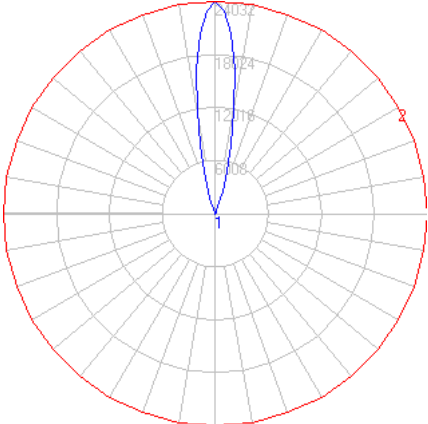


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	24032.195
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	20.1
Vertical Beam Angle (50%)	20.1
Horizontal Field Angle (10%)	36.3
Vertical Field Angle (10%)	36.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1564
Beam Efficiency	N.A.
Field Lumens	2910
Field Efficiency	N.A.
Spill Lumens	541
Luminaire Lumens	3450
Total Efficiency	N.A.
Total Luminaire Watts	36
Ballast Factor	1.00


Zonal Lumen Summary

Zone	Lumens
0-10	1674.53
10-20	1416.57
20-30	228.63
30-40	67.90
40-50	44.36
50-60	25.26
60-70	6.00
70-80	0.97
80-90	0.69
90-100	0.61
100-110	0.45
110-120	0.06
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

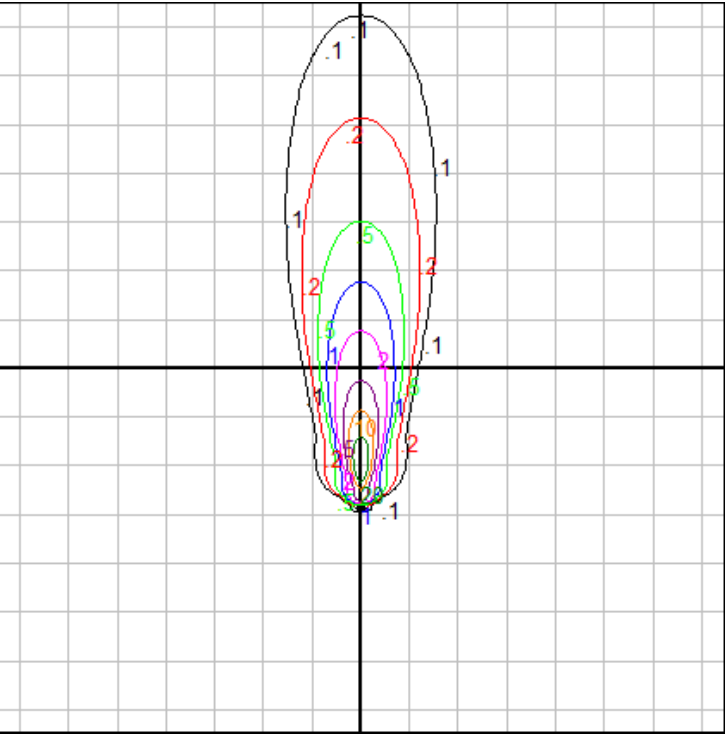

Setback Distance: 1.5 ft.

Grid Spacing: 7 ft.

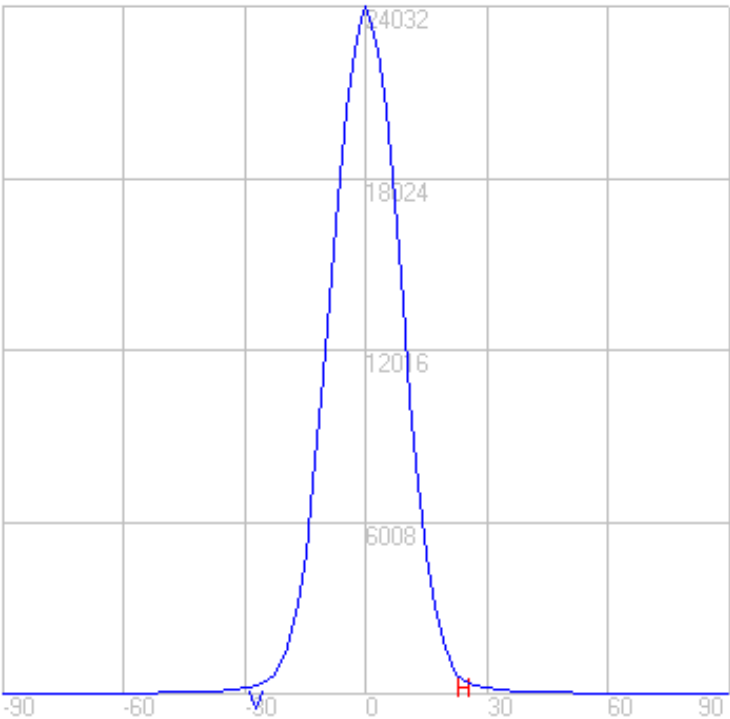

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2025

06/30/2026

BEGA

File: 84632K3_BEGA_IES.ies

TEST: 84632K4
TEST LAB: BEGA
DATE: 06/30/2026
LUMINAIRE: 84632K3
LAMP: 32W LED

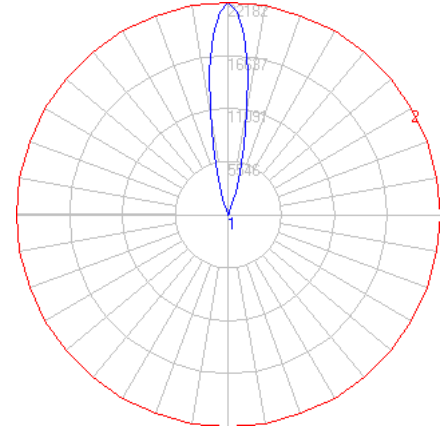


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	22182.199
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	20.1
Vertical Beam Angle (50%)	20.1
Horizontal Field Angle (10%)	36.3
Vertical Field Angle (10%)	36.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1444
Beam Efficiency	N.A.
Field Lumens	2686
Field Efficiency	N.A.
Spill Lumens	499
Luminaire Lumens	3185
Total Efficiency	N.A.
Total Luminaire Watts	36
Ballast Factor	1.00


Zonal Lumen Summary

Zone	Lumens
0-10	1545.62
10-20	1307.52
20-30	211.03
30-40	62.68
40-50	40.95
50-60	23.32
60-70	5.54
70-80	0.90
80-90	0.64
90-100	0.56
100-110	0.41
110-120	0.05
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

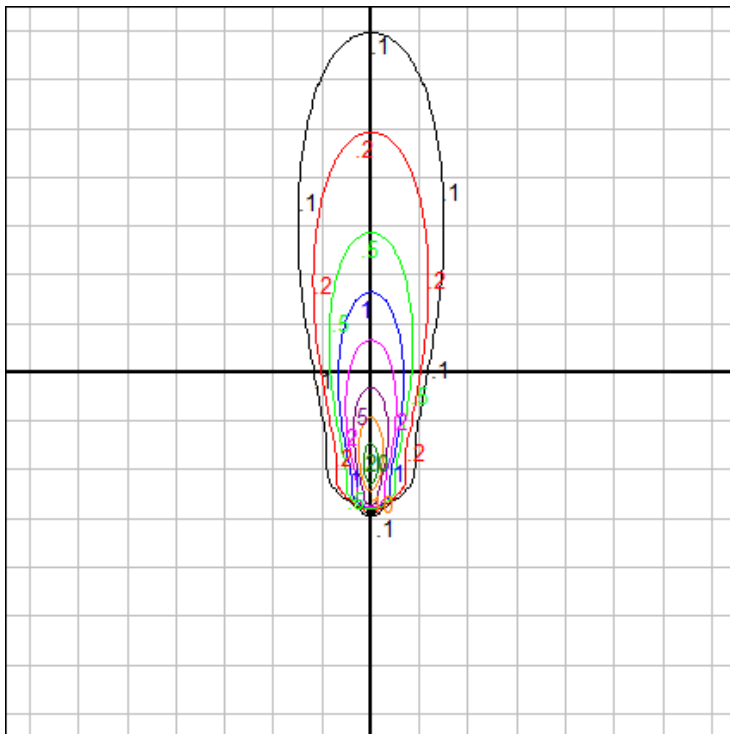

Setback Distance: 1.5 ft.

Grid Spacing: 7 ft.

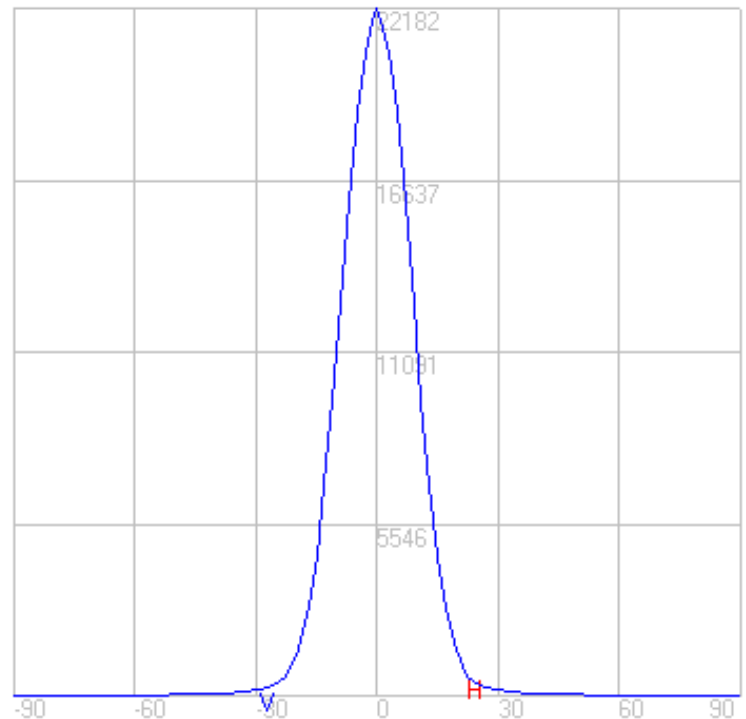

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2025

06/30/2026

BEGA

File: 84632K27_BEGA_IES.ies

TEST: 84632K4
TEST LAB: BEGA
DATE: 06/30/2026
LUMINAIRE: 84632K27
LAMP: 32W LED

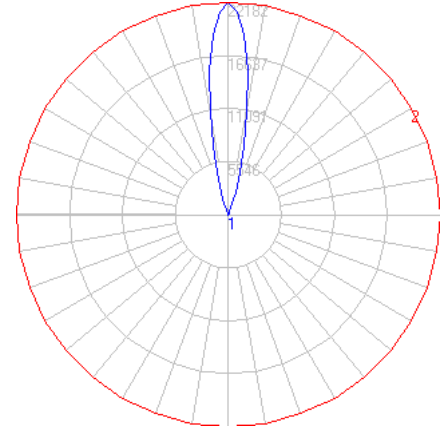


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	22182.199
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	20.1
Vertical Beam Angle (50%)	20.1
Horizontal Field Angle (10%)	36.3
Vertical Field Angle (10%)	36.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1444
Beam Efficiency	N.A.
Field Lumens	2686
Field Efficiency	N.A.
Spill Lumens	499
Luminaire Lumens	3185
Total Efficiency	N.A.
Total Luminaire Watts	36
Ballast Factor	1.00


Zonal Lumen Summary

Zone	Lumens
0-10	1545.62
10-20	1307.52
20-30	211.03
30-40	62.68
40-50	40.95
50-60	23.32
60-70	5.54
70-80	0.90
80-90	0.64
90-100	0.56
100-110	0.41
110-120	0.05
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

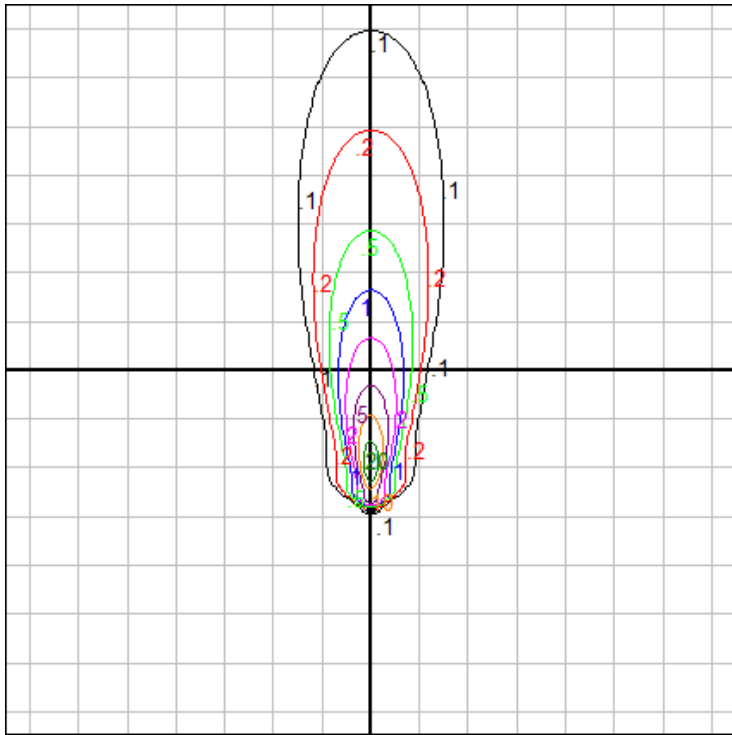

Setback Distance: 1.5 ft.

Grid Spacing: 7 ft.

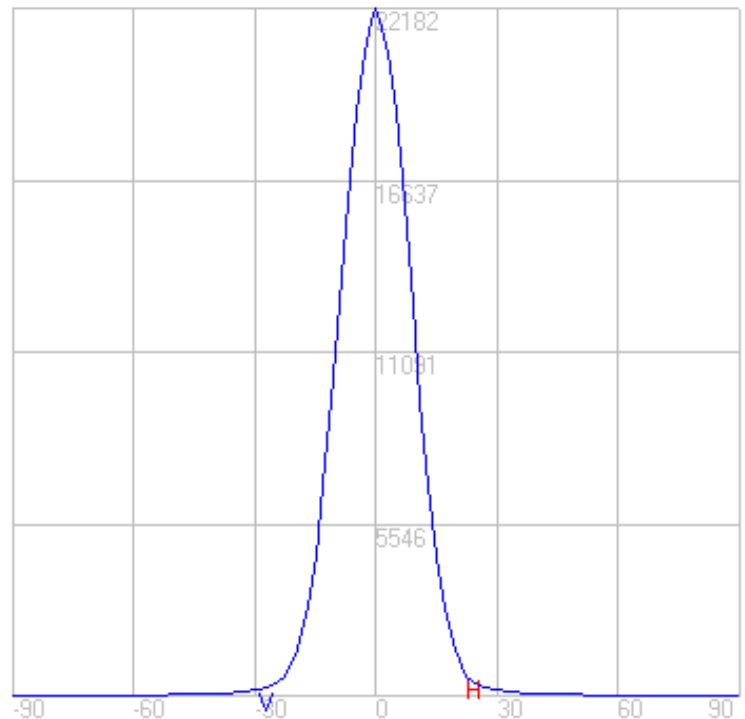


In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA

File: 84632K4_NSL_BEGA_IES.ies

TEST: 84632RK4
TEST LAB: BEGA
DATE: 06/30/2026
LUMINAIRE: 84632K4 + Non Skid Lens
LAMP: 32W LED

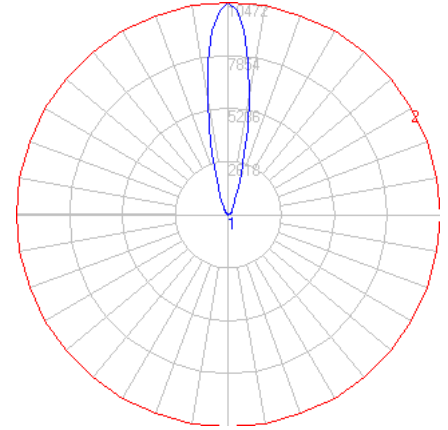


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	10471.9
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	22.3
Vertical Beam Angle (50%)	22.3
Horizontal Field Angle (10%)	44.8
Vertical Field Angle (10%)	44.8
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	880
Beam Efficiency	N.A.
Field Lumens	1764
Field Efficiency	N.A.
Spill Lumens	943
Luminaire Lumens	2708
Total Efficiency	N.A.
Total Luminaire Watts	36
Ballast Factor	1.00


Zonal Lumen Summary

Zone	Lumens
0-10	765.24
10-20	877.07
20-30	379.32
30-40	227.02
40-50	168.84
50-60	127.60
60-70	91.36
70-80	56.63
80-90	19.85
90-100	0.08
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

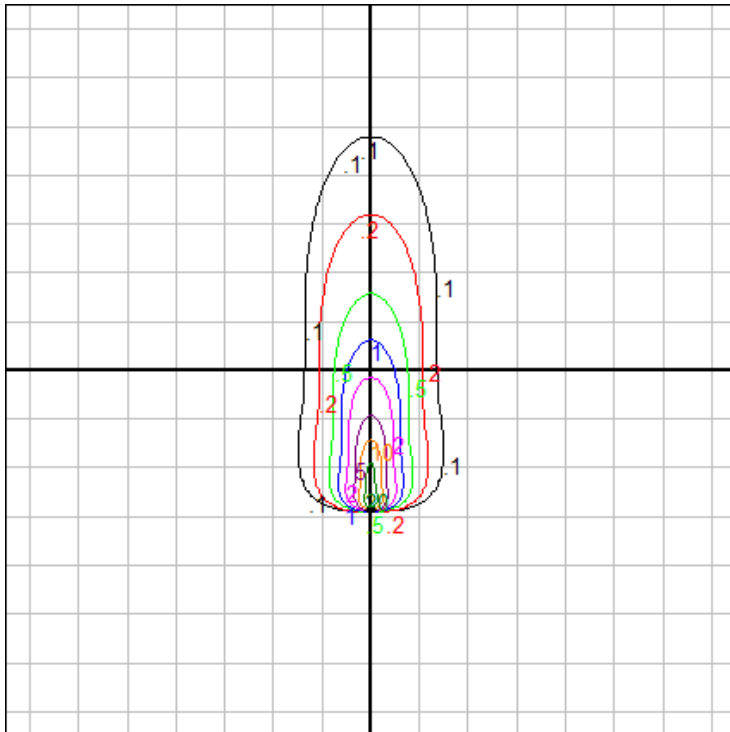

Setback Distance: 1.5 ft.

Grid Spacing: 7 ft.

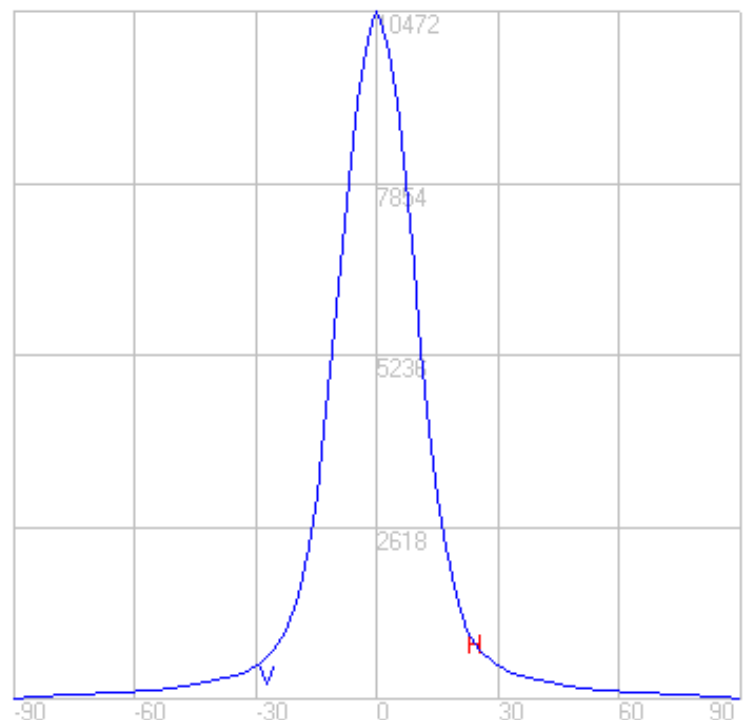

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2025

06/30/2026