

Application

In-grade adjustable floodlight luminaires. The patented mounting system allows for installation in pre-cored holes such as stone, tile or decks. These luminaires are designed to bear pressure loads up to 4400 lbs. from vehicles with pneumatic tires. The luminaires must not be used for traffic lanes where they are subject to horizontal pressure from vehicles braking, accelerating and changing direction. The inclination angle is adjustable up to 30°, and the optical assembly can be rotated 360° around the vertical axis.

Materials

Clear safety glass
316 grade stainless steel
Fully potted waterstopper cable
Stainless steel helicoils
Stainless steel screw clamps
Aluminum installation housing
BEGA Hybrid Optics®

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 68

Weight: 4.5 lbs.

Electrical

Operating voltage	120-277VAC
Minimum start temperature	-30° C
LED module wattage	3.8W
System wattage	6.5W
Controllability	0-10V dimmable
Color rendering index	Ra > 90
Luminaire lumens	438lm
LED service life (L70)	60000hrs

LED color temperature

4000K (K4)
3500K (K35)
3000K (K3)
2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

#4 brushed stainless steel. Custom colors are not available.

Type:


BEGA Product:

Project:

Modified:

Available options

DALI-2	Enabled for DALI control system
FSC	Fusing
NSL	Non-skid lens

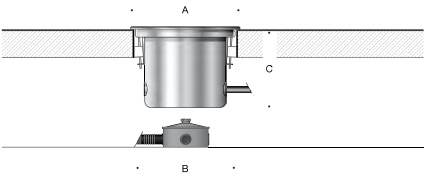

In-grade luminaire · Adjustable · Very wide beam

	LED	β	A	B	C
B84784	3.8W	58°	6 1/8	5 3/4	6

