

Application

Pole-top luminaire with adjustable, indirect light distribution. A symmetric distribution is produced when the top reflector is set in the horizontal position and becomes asymmetric when the reflector is adjusted from 0° to 30°. Not compatible with fixed base poles. Requires a hinged, 5" base diameter pole to install driver box. A high EPA pole is required to support this luminaire.

Materials

Clear safety glass
Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
High temperature silicone gasket
Pure anodized aluminum reflector surface

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 50.0 lbs.

EPA (Effective projection area): 6.0 sq. ft.

Electrical

Operating voltage 120-277V AC
Minimum start temperature -40° C
LED module wattage 42.0 W
System wattage 50.0 W
Controllability 0-10V dimmable
Color rendering index Ra > 80
Luminaire lumens 2284 lm
LED service life (L70) 60000 hrs

LED color temperature

4000K (K4)
3500K (K35)
3000K (K3)
2700K (K27)


BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK) Bronze (BRZ)
Silver (SLV) White (WHT)
RAL: CUS:



Type:


BEGA Product:

Project:

Modified:

Available options

CUS Custom finish
FSC Fusing
MGU Marine grade undercoat
RAL RAL Classic, matte finish

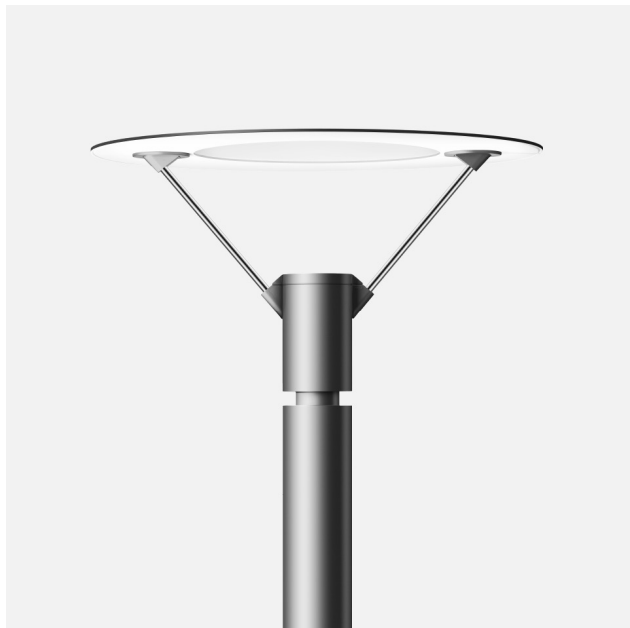

Indirect pole-top luminaire · Adjustable · Cut-off optics

	LED	A	B
B88309	42.0 W	39 ³ / ₈	24 ¹ / ₄

BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 info@bega-us.com

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on this sheet is subject to change at the discretion of BEGA North America. For the most current technical data, please refer to bega-us.com
© copyright BEGA 2026 Updated 08/21/26