


BEGA

Photometric Filename: 31086.IES

TEST: BE31086
TEST LAB: BEGA
DATE: 2/19/2015
LUMINAIRE: 31 086
LAMP: 5.3W LED

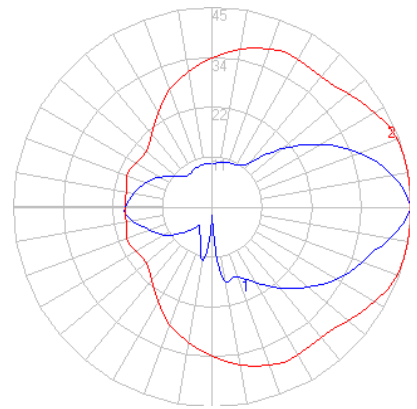


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	268
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	38
Total Luminaire Watts	7
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.26 ft (Diameter)
Luminous Height	0.85 ft

Zonal Lumen Summary

Zone	Lumens
0-10	1.02
10-20	3.90
20-30	6.28
30-40	9.72
40-50	14.18
50-60	19.33
60-70	24.23
70-80	28.72
80-90	33.51
90-100	33.33
100-110	28.99
110-120	23.02
120-130	16.39
130-140	10.28
140-150	6.52
150-160	4.70
160-170	2.87
170-180	0.95

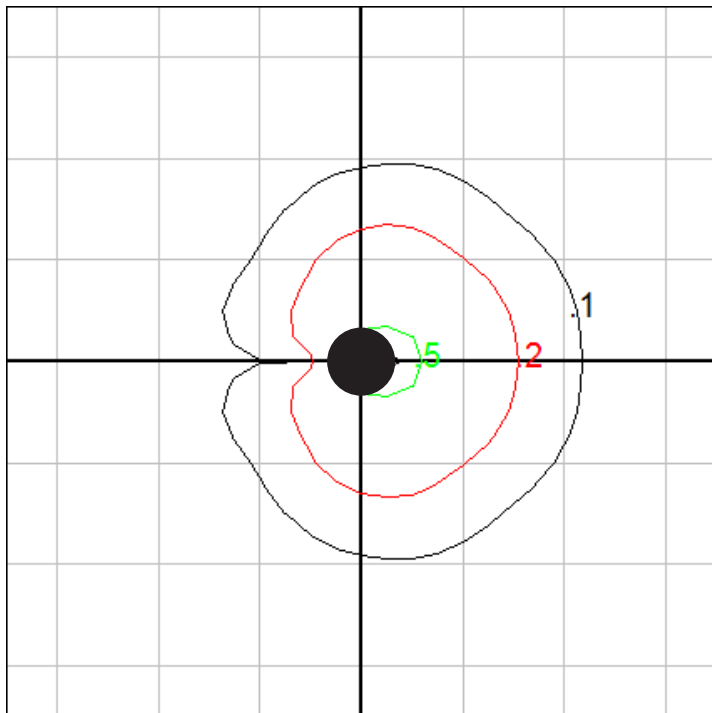

Wall Mount - Isogrid on Floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

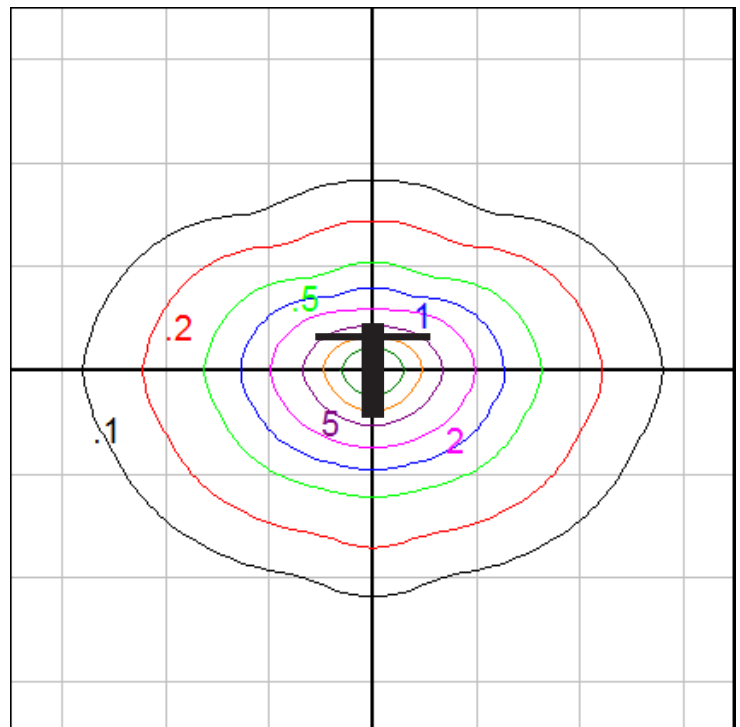

Wall Mount - Isogrid on Wall Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.